


FOOT MOUNT

Standard 210 Bar Series

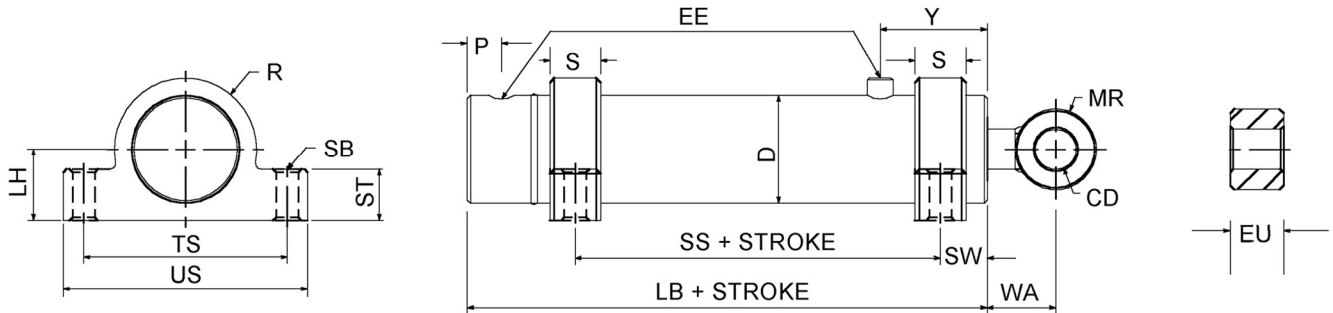

CYL BORE	ROD DIA	CD (H11)	D	EE bspp	EU	TS	US	LB	MR max	P	Y	WA	ST max	LH	R	SB	SW	S	SS max
1.00"	0.50"	12.70	38	G1/4	16	80	100	93	12.5	13	32	25	20	27	28	9	18	20	22
	19																		
1.25"	0.62"	15.88	44.5	G1/4	19	85	105	102	16	13	40	28	23	32	32	9	20	20	28
	25																		
1.50"	0.75"	19.05	51	G3/8	25	100	125	131	20	15	50	32	26	35	35	11	22.5	25	48
	32																		
2.00"	1.00"	22.23	63.5	G3/8	32	120	145	148	22	15	60	38	30	44	44	13.5	26	32	58
	1.25"				38														
	1.50"				45														
2.50"	1.25"	25.40	76.2	G1/2	38	140	175	169	25	20	75	43	35	51	51	17.5	28	32	71
	1.50"				45														
	1.75"				50														
3.00"	1.50"	31.75	88.9	G1/2	45	160	195	184	32	20	85	52	40	58	58	17.5	29	32	75
	1.75"				50														
	2.00"				57														
3.25"	1.75"	38.10	95.3	G1/2	50	170	210	184	38	20	85	60	45	62	62	22	33	40	77
	2.00"				57														
	2.25"				63.5														
3.50"	1.75"	38.10	101.6	G1/2	50	180	220	189	38	20	90	60	45	65	65	22	34	40	81
	2.00"				57														
	2.25"				63.5														
4.00"	2.00"	44.45	114.3	G3/4	57	210	260	204	45	26	95	70	55	75	75	26	40	50	75
	2.25"				63.5														
	2.50"				76.2														
	3.00"				90														
4.50"	2.00"	44.45	130	G3/4	57	225	275	219	45	26	100	70	55	85	85	26	40	50	90
	2.25"				63.5														
	2.50"				76.2														
	3.00"				90														
5.00"	2.50"	50.80	146	G3/4	76.2	255	320	239	51	26	115	81	65	95	95	32	47.5	65	95
	3.00"				90														
	3.50"				102														
6.00"	3.00"	63.50	171.5	G3/4	90	290	350	260	60	26	136	95	80	110	110	32	48.5	65	115
	4.00"				115														
7.00"	3.50"	76.20	203.2	G1	102	340	410	293	70	34	155	108	90	130	130	38	59	80	116
	4.00"				115														
8.00"	4.00"	76.20	228.6	G1	115	370	440	318	75	34	180	115	100	145	145	38	59	80	141
	5.00"				150														