


MALE CLEVIS

Standard 210 Bar Series

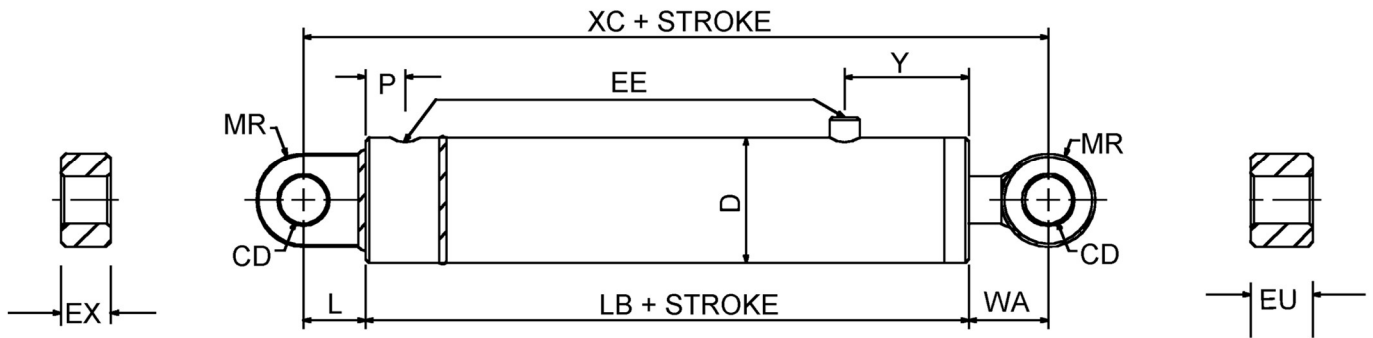

CYL BORE	ROD DIA	CD (H11)	D	EE bspp	EX	EU	L	LB	MR max	P	Y	WA	XC
1.00"	0.50"	12.70	38	G1/4	12	16	16	94	12.5	13	32	25	135
	0.62"					19							
1.25"	0.62"	15.88	44.5	G1/4	16	19	20	102	16	13	40	28	150
	0.75"					25							
1.50"	0.75"	19.05	51	G3/8	20	25	25	131	20	15	50	32	188
	1.00"					32							
2.00"	1.00"	22.23	63.5	G3/8	25	32	32	148	22	15	60	38	218
	1.25"					38							
	1.50"					45							
2.50"	1.25"	25.40	76.2	G1/2	32	38	40	169	25	20	75	43	252
	1.50"					45							
	1.75"					50							
3.00"	1.50"	31.75	88.9	G1/2	32	45	40	184	32	20	85	52	276
	1.75"					50							
	2.00"					57							
3.25"	1.75"	38.10	95.3	G1/2	40	50	50	184	38	20	85	60	294
	2.00"					57							
	2.25"					63.5							
3.50"	1.75"	38.10	101.6	G1/2	40	50	50	189	38	20	90	60	299
	2.00"					57							
	2.25"					63.5							
4.00"	2.00"	44.45	114.3	G3/4	50	57	63	204	45	26	95	70	337
	2.25"					63.5							
	2.50"					76.2							
	3.00"					90							
4.50"	2.00"	44.45	130	G3/4	50	57	63	219	45	26	100	70	352
	2.25"					63.5							
	2.50"					76.2							
	3.00"					90							
5.00"	2.50"	50.80	146	G3/4	60	76.2	71	239	51	26	115	81	391
	3.00"					90							
	3.50"					102							
6.00"	3.00"	63.50	171.5	G3/4	80	90	90	260	60	26	136	95	445
	4.00"					115							
7.00"	3.50"	76.20	203.2	G1	80	102	90	293	70	34	155	108	491
	4.00"					115							
8.00"	4.00"	76.20	228.6	G1	100	115	112	318	75	34	180	115	545
	5.00"					150							